





KRONOS Series

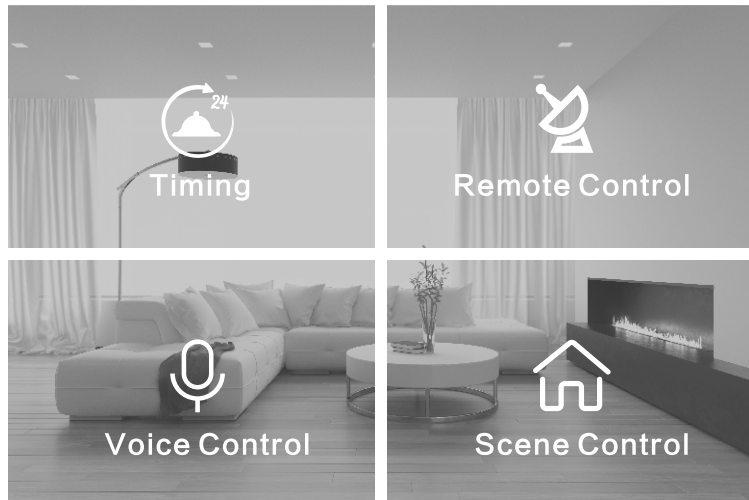

Smart home,Simple living

Intelligent remote control APP realize personalizing editing of intelligent scene, including timing, device remote control, device voice control, scene remote control etc. Users can realize smart home control anytime and anywhere.

■ Google Home Voice Control

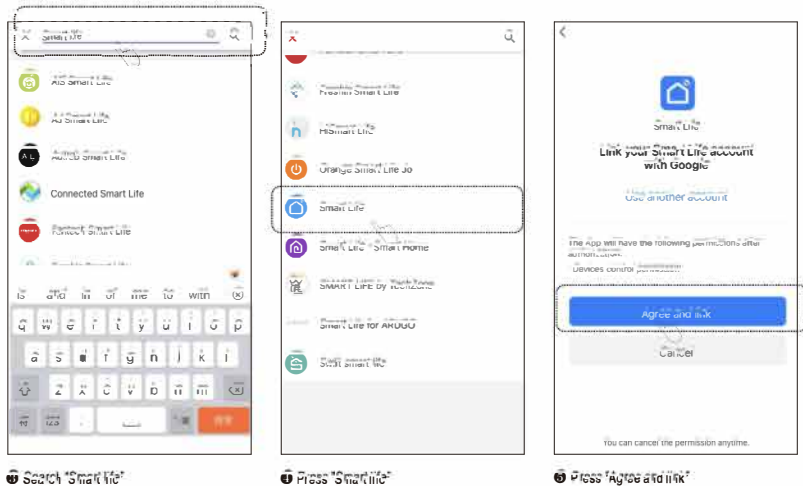

* Now you can voice control the device by Google Home; for example, if the device name is "Blinds", you can say: "Ok google, turn on the blinds"; "Ok google, turn off the blinds".

■ Connect Wifi and turn on Bluetooth

■ Install App




Mobile Phone



Wireless Router



■ Tubular Motor Configuration Procedure




① Press the setting key three times quickly and shortly on the motor


Note: Press emitter button: P2 → UP → P2 equal to press setting key three times.




① Press Sign Up for new account




② Fill your email and press Send



③ Send Verification Code



④ Set your Password



② The account has been

■ Google Home Voice Control

① Install APP


Please download and install "Google Home" from app store on your mobile device, login your account and connect to network.

② Connect "Google Home" app with your Google voice device (open GPS on your device)


③ Link "Smart Life" account with Google and achieve motor voice control



google home APP

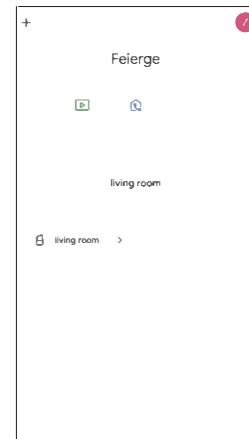


① Open "Google Home" APP, then press "Settings"

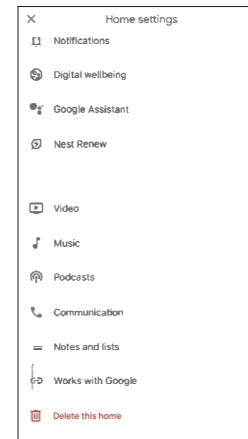

② Press "Works with Google"

■ Amazon Echo Voice Control

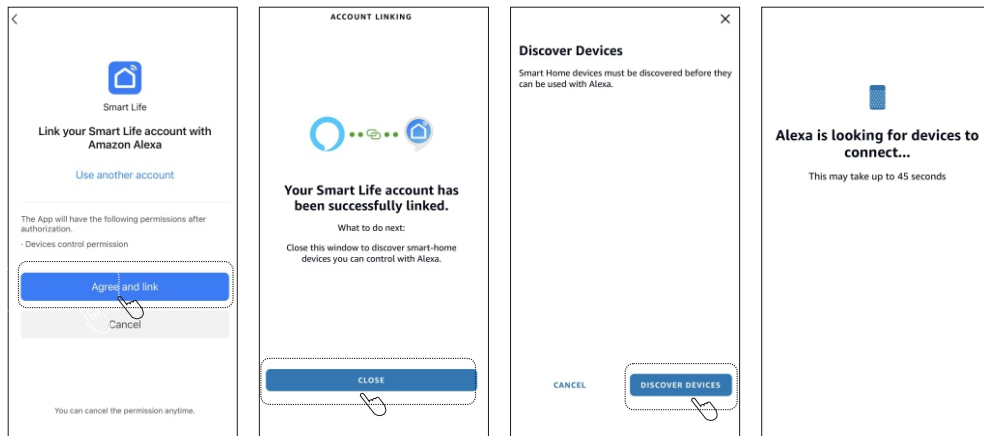

5 Press "Agree and link"

6 The page display Your Smart Life account has been successfully linked, then press "CLOSE"


7 Press "DISCOVER DEVICES"

8 Wait patiently for the progress bar to complete

Now you can voice control the device by Amazon Echo, for example, if your device name is "Blinds", you can say: "Alexa, open the blinds". "Alexa, close the blinds"

Note : Motor and Echo should be placed within the wifi signal range, otherwise you will not be able to control the motor with APP or voice.

■ Tubular Motor Configuration Procedure

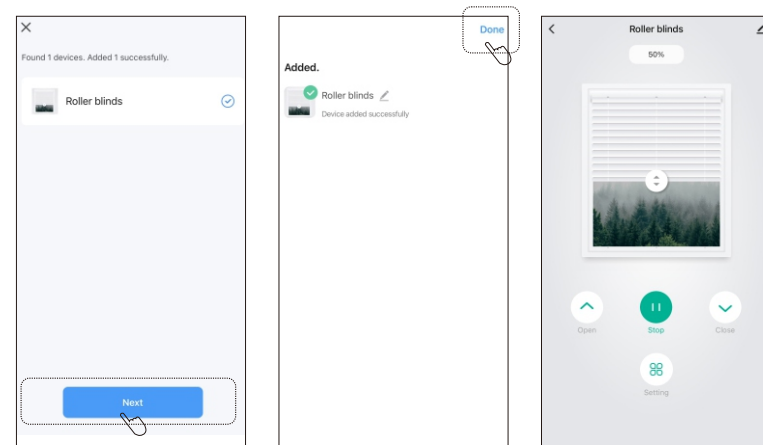


5 Press "Next"

6 Press "Done"


7 Device connecting success

■ Switch the running direction of Blinds/Roller Shutter by APP

After the device connect success, press "Open", if the blinds/roller shutter runs in close direction, now the motor needs to switch direction, as below the operation:

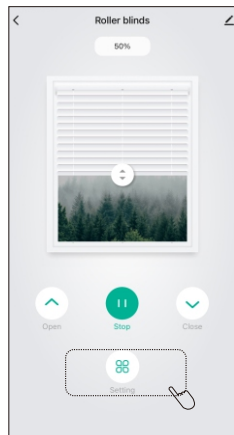


① Press "Setting"

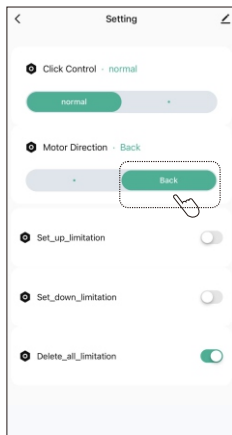


② Press "Back", the motor beep three times and clockwise and counter-clockwise rotation once hint the motor switch direction success

■ Amazon Echo Voice Control


③ Link "Smart Life" account with "Amazon Alexa" and achieve motor voice control

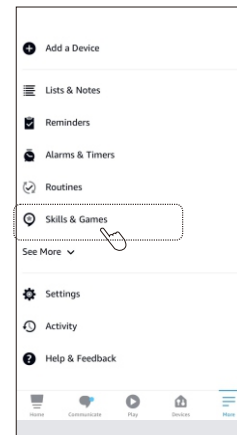


① Open Amazon Alexa app, press "More", then press "Skill & Games"

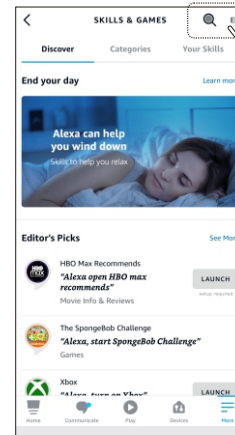

② Click the search button "Q"

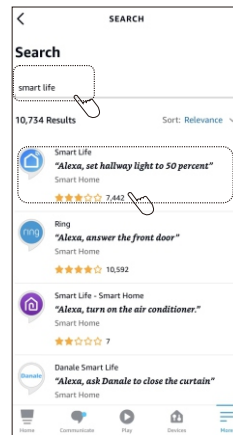

③ Input "Smart Life", then press "Smart Life"

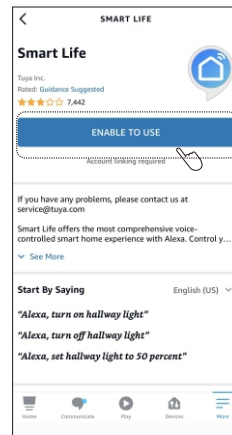

④ Press "ENABLE TO USE"

■ Amazon Echo Voice Control

① Install APP

Please download and install "Alexa app" from app store on your mobile device, login your account and connect to network.




Amazon Alexa APP


② Connect "Alexa app" with your echo device (open GPS on your mobile device)

■ Set Blinds/Roller Shutter limitation by APP


1.Up position set up

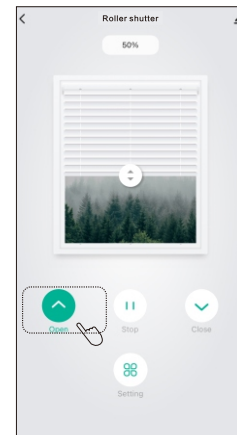


① Press "Open", the motor runs in the open direction

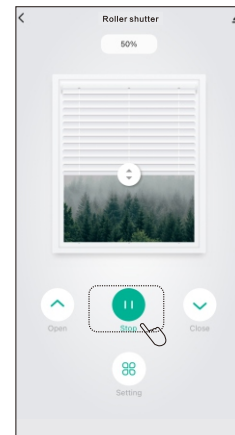

② Press "Stop" when running to ideal position, the motor stop

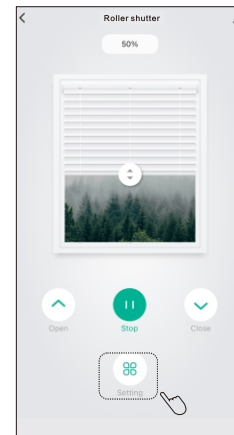

③ Press "Setting"

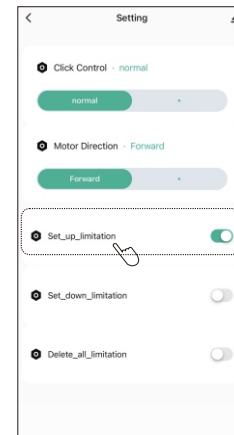


④ Click "Set_up_limitation", the motor beep three times and clockwise and counter-clockwise rotation once, hint up position set up success

Note : 1. Before formal use, the limitation must be set up.

2. When using the APP to set the limitation, you must ensure that the WIFI signal is stable and pay attention to avoid unnecessary damage to the blinds/roller shutter.

■ Set Blinds/Roller Shutter limitation by APP

2.Down position set up

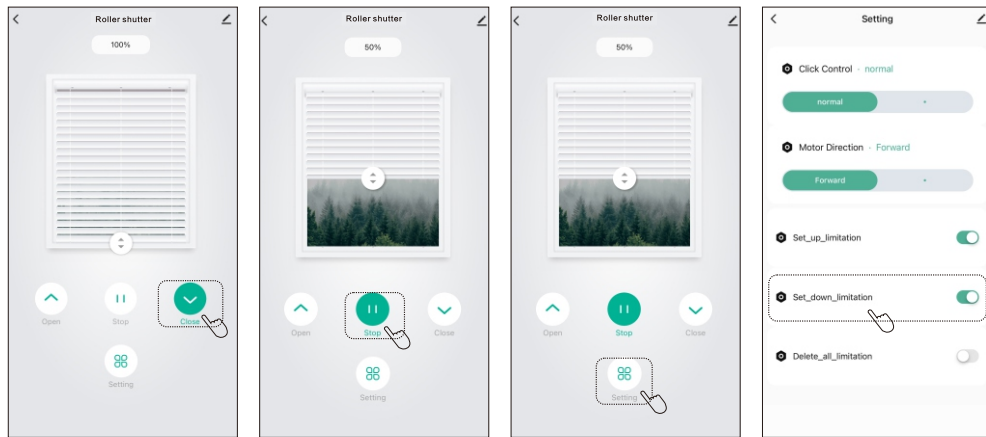

① Press "Close", the motor runs in the close direction

② Press "Stop" when running to ideal position, the motor stop

③ Press "Setting"

④ Click "Set_down_limitation", the motor beep three times and clockwise and counter-clockwise rotation once, hint down position set up success.

Note :After the limitation set up success, you can drag the "⊕" icon on the interface to the required position,the blinds/roller shutter will also run to the corresponding position.

? Why you can't remote control?

- 1. Please make sure your home router could connect with the network.
- 2. Please make sure your motor can connect with your home router.
- 3. The bi-directional motor which you want to control may has been configured with Person A's App account. Please configurate again or through device sharing by Person A's App account.

? Why the device is offline?

- 1. Please make sure the motor can connect with your home router.
- 2. Normally there is a maximum users to use the network. Please check if your home router has been connected with too many devices. If so, please change the home router that could supply more devices.

■ FAQ

? How to change the name of device?

... press "Z" on the upper right corner--> type name in-->press confirm

? How to delete device?

... Method 1: press "Z" on the upper right corner --> press "remove device" --> press "confirm"

Method 2: Press the setting key of the motor three times quickly.

? How to make everyone control the motor on the APP?


... When person A's APP have connected with the motor, the person B can't connect with the motor again by pressing setting key of the motor three times quickly. The motor can only be connected by one account. If person B did it, person A will lose the device on his App. Person A shall share the device to Person B to let him control the motor on the APP as well.

Press "Z" on person A's APP--> press "Share Device"---> press "add sharing" ---> press the person B's account


? Why the configuration being unsuccessful?

- ... 1.Please make sure your phone has been connected with wifi and your home router could connect with the network.
2.Please ensure the motor's Wifi frequency is matched with router's frequency.
3.Please reset your phone network, and continuously press the setting key three times on the motor. Please configurate again until the indicator blink rapidly or wait five seconds.

■ Delete Blinds/Roller Shutter limitation by APP

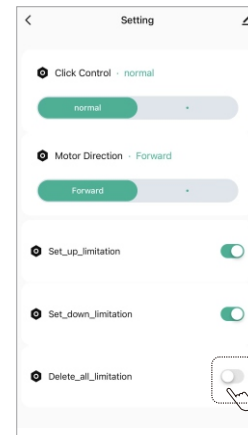


① Continuously click "Delete_all_limitation" five times, the motor beep three times and clockwise and counter-clockwise rotation once to hint delete limitation success

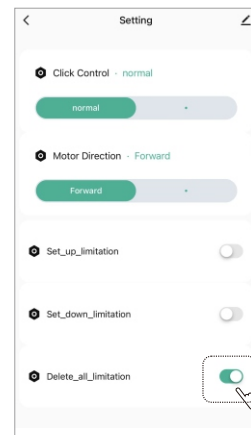


② After deleting limitation, the "Delete_all_limitation" is selected


■ Curtain Motor Configuration Procedure




1 Short press the setting key three times on the motor quickly, waiting the red light blink, the motor enters the state of network pairing

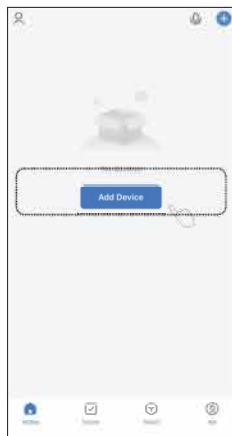

2 Open the Smart Life APP, press "Add Device"

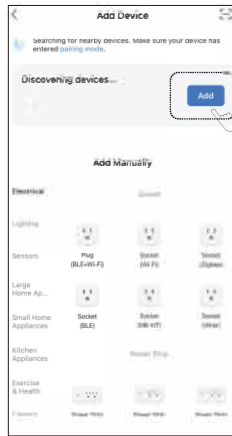


3 Press "Add"

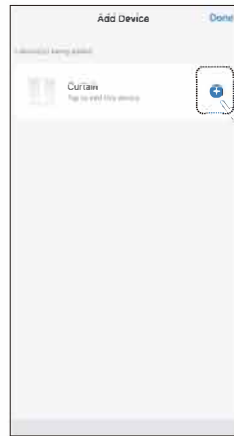


4 Press "+"

■ Curtain Motor Configuration Procedure

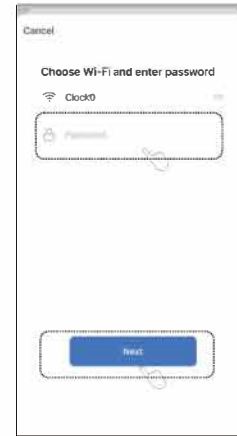


5 Input the Wifi password, press "Next"

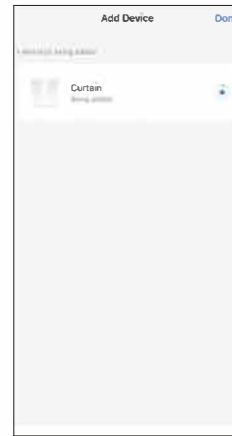

6 Wait patiently to add device



7 Add the device, modify the device name, then press "Done"

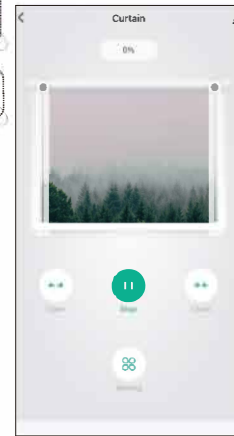

8 Add the device successfully

Note:

1. Set the limitation: curtain motor switch off, waiting for 10s then switch on, press "Open" or "Close" button of app to make the curtain motor run, the curtain motor enter automatic set limitation state, after each sides hitting once, then run to the completely opened position (if curtain stop at the closed position, please perform "direction switching operation"), the limitation set successfully.
2. After the limitation set up successfully, you can drag the "●" icon on the interface to the required position, the curtain motor will run to the corresponding position